

EMISSION OF AMMONIA, NITROUS OXIDE AND METHANE FROM HEN HOUSE IN DEEP LITTER/SLATTED FLOOR SYSTEM

Summary

The objective of this paper was to report a characterization of NH_3 , N_2O and CH_4 concentrations and emissions from a commercial poultry farm under Polish conditions. The research was conducted in the deep litter/slatted floor poultry house in Greater Poland Region, where breeding hens (line ROSS 308) were housed. During 18 months, for 13 selected days the temperature and the concentration of NH_3 , CH_4 , and N_2O were monitored inside and outside the building. To measure the concentrations of the gases the photo-acoustic spectrometer Multi Gas Monitor Innova 1312 was used. Mean gas concentrations in the studied poultry house were: $21.3 \pm 11.6 \text{ mg}\cdot\text{m}^{-3}$ for NH_3 , $2.50 \pm 1.23 \text{ mg}\cdot\text{m}^{-3}$ for N_2O and $6.3 \pm 3.4 \text{ mg}\cdot\text{m}^{-3}$ for CH_4 . Gas concentrations in the studied poultry house were correlated with the ventilation rate. The correlation coefficients were: $r_{\text{NH}_3} = -0.92$, $r_{\text{N}_2\text{O}} = -0.66$ and $r_{\text{CH}_4} = 0.86$. The gas emission factors were on average $2.01 \pm 0.53 \text{ g}\cdot\text{day}^{-1}\cdot\text{hen}^{-1}$ ($284 \pm 88 \text{ g}\cdot\text{day}^{-1}\cdot\text{LU}^{-1}$) for NH_3 , $0.118 \pm 0.087 \text{ g}\cdot\text{day}^{-1}\cdot\text{hen}^{-1}$ ($16.8 \pm 13.9 \text{ g}\cdot\text{day}^{-1}\cdot\text{LU}^{-1}$) for N_2O and $0.90 \pm 0.77 \text{ g}\cdot\text{day}^{-1}\cdot\text{hen}^{-1}$ ($130 \pm 114 \text{ g}\cdot\text{day}^{-1}\cdot\text{LU}^{-1}$) for CH_4 .

Key words: ammonia, greenhouse gases, emission, deep litter/slatted floor system, poultry

EMISJA AMONIAKU, PODTLENKU AZOTU I METANU Z KURNIKA ŚCIOŁKOWO-RUSZTOWEGO DLA KUR REPRODUKCYJNYCH

Streszczenie

Celem pracy było wyznaczenie stężeń oraz emisji amoniaku i gazów cieplarnianych z budynku ściółkowo-rusztowego dla kur nieśnych w polskich warunkach klimatycznych. Badania prowadzono w obiekcie zlokalizowanym w województwie wielkopolskim, gdzie były utrzymywane kury reprodukcyjne linii ROSS 308. W ciągu 18 miesięcy, przez 13 wybranych dni monitorowano temperaturę i stężenia NH_3 , N_2O oraz CH_4 . Do pomiaru stężeń badanych gazów na zewnątrz i wewnątrz budynku używano spektrometru foto-akustycznego Multi Gas Monitor Innova 1312. Średnie stężenia gazów w badanym kurniku były równe: $21,3 \pm 11,6 \text{ mg}\cdot\text{m}^{-3}$ dla NH_3 , $2,50 \pm 1,23 \text{ mg}\cdot\text{m}^{-3}$ dla N_2O oraz $6,3 \pm 3,4 \text{ mg}\cdot\text{m}^{-3}$ dla CH_4 . Wskaźniki emisji badanych zanieczyszczeń gazowych średnio wynosiły $2,01 \pm 0,53 \text{ g}\cdot\text{dzień}^{-1}\cdot\text{szt.}^{-1}$ ($284 \pm 88 \text{ g}\cdot\text{dzień}^{-1}\cdot\text{DJP}^{-1}$) dla NH_3 , $0,118 \pm 0,087 \text{ g}\cdot\text{dzień}^{-1}\cdot\text{szt.}^{-1}$ ($16,8 \pm 13,9 \text{ g}\cdot\text{dzień}^{-1}\cdot\text{DJP}^{-1}$) dla N_2O oraz $0,90 \pm 0,77 \text{ g}\cdot\text{dzień}^{-1}\cdot\text{szt.}^{-1}$ ($130 \pm 114 \text{ g}\cdot\text{dzień}^{-1}\cdot\text{DJP}^{-1}$) dla CH_4 .

Słowa kluczowe: amoniak, gazy cieplarniane, emisja, kurnik ściółkowo-rusztowy, kury nieśne

1. Introduction

Agriculture, including poultry houses, is a source of gaseous air pollutants. Laying and breeding hens are kept mainly in large commercial farms. This effectively reduces unit costs of production, but entails a negative environmental impact, not only in the vicinity of the farms [13, 14]. High stock density in modern buildings for poultry may reduce indoor air quality and emissions of ammonia (NH_3), nitrous oxide (N_2O), methane (CH_4), dust, pathogens and other micro-organisms [2]. In poultry production, the ammonia has been recognized as a major aerial pollutant, especially for laying and breeding hens. The release of NH_3 is one of the main ways of nitrogen emissions into the atmosphere and contributes to its subsequent deposition. The emitted ammonia undergoes the chemical transformation, which may cause negative effects, both in soil (acidification) and water (eutrophication) [20]. Moreover it leads to poor indoor air quality that affects the health of animals and workers. It has been reported that NH_3 concentrations and emissions in poultry houses are usually higher than those from other animal species, e.g.: dairy cattle and swine [8]. Greenhouse gases, including N_2O and CH_4 are other significant gaseous air pollutants. Methane and nitrous oxide

emission from poultry facilities are lower if compared to other livestock productions, although both are greenhouse gases with a higher warming potential than carbon dioxide (CO_2) [1, 21].

Hens, depending on the type of production, are kept in cage or floor systems (deep litter or deep litter/slatted floor). Housing system and resulting from its choice: manure removal and storage system, the type of ventilation system, the use of litter and stock density have an impact on the formation and release of harmful gases. The composition and type of forage, weather conditions and geographical location may also affect gases emission [23].

The deep litter/slatted floor housing system for hens is a combination of bedding and non-litter systems. Limiting the littered area reduces the emission of harmful gases, mainly ammonia. On the other hand, the use of litter in part of hen house has a positive influence on the welfare of hens. There are many papers published in the last decades concerning ammonia and greenhouse gases emission from poultry houses. Most of them are about battery cage poultry houses [1, 6, 13, 24] less deep litter systems [5, 8, 16] and few deep litter/slatted floor housing systems [10, 17]. The studies were carried out mainly in western and northern Europe, North America and China. In the Polish literature,

there is no long-term research of harmful gases emission from commercial facilities for laying and breeding hens.

The objective of this paper was to report a characterization of NH_3 , N_2O and CH_4 concentrations and emissions from a commercial farm of breeding hens under Polish conditions.

2. Material and methods

Research facility

The research was conducted in the deep litter/slatted floor poultry house located in the Great Poland Region, where breeding hens (line ROSS 308) were housed from 18 to 58 week of age. The studied object had 110.4 m length and 15.2 m width. It was designed for 11,800 units (11,000 hens and 800 roosters) (Fig. 1).



Source: Authors' photos / Źródło: fot. autorów

Fig. 1. Studied poultry house

Rys. 1. Badany kurnik

The ratio of litter area (rye straw or wheat-rye straw) to area of the slatted floor was 2:1. The manure bin under slatted floor and nests (automatic eggs handling) were situated in the central part of the building along its axis (Fig. 2). The droppings and manure were removed after the end of production cycle. Animals were fed *ad libitum* (Tab. 1) and the processes of feeding and drinking were automated. The building was heated by 250 kW water boiler for solid fuel (coal dust or coal peas) and 6 heat exchangers (water-air) with a heating power of 45 kW each.

Table 1. Chemical composition of feed


Tab. 1. Skład chemiczny paszy

Feed composition	Content
Crude protein	16.5 %
Crude fat	3.30 %
Ash	11 %
Crude fiber	4 %
Metabolic energy	11.50 MJ·kg ⁻¹

Source: own elaboration / Źródło: opracowanie własne

Ventilation rate


The studied poultry house was equipped with a negative pressure mechanical ventilation. The air was removed from the building by 4 roof fans (Big Dutchman FC080-6E), each with a nominal efficiency of 23,000 m³·h⁻¹ and 4 wall fans (Big Dutchman Air Master EM 50), each with a nominal efficiency of 37,430 m³·h⁻¹. The fresh air was provided by 70 wall inlets with regulation of flow rate (Fig. 3). The microclimate controller (Big Dutchman Viper) (Tab. 2), managed the work of fans and the degree of opening of the air inlets, based on the temperature of the air inside the poultry house and according to user settings.

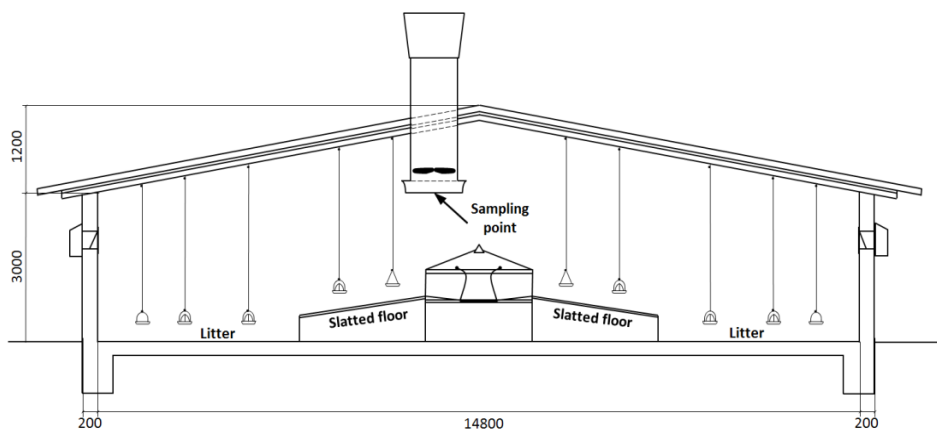

Source: own elaboration / Źródło: opracowanie własne

Fig. 2. The cross-section of the poultry house

Rys. 2. Przekrój budynku

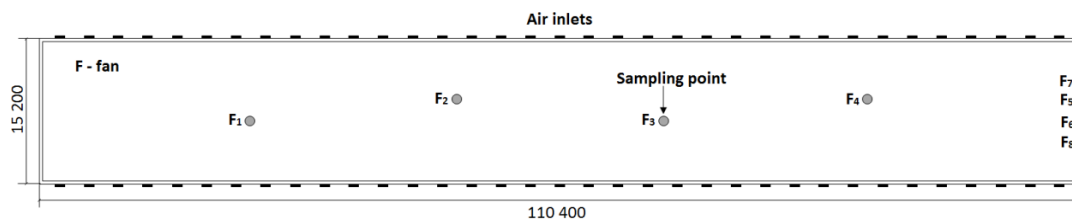

Source: own elaboration / Źródło: opracowanie własne

Fig. 3. The layout of the poultry house

Rys. 3. Rzut przyziemia budynku

Table 2. The user setting of fans
 Tab. 2. Ustawienie matrycy sterownika wentylacji

Ventilation mode	Temperature (°C)	Operating time (s)	Break time (s)	Fans						Air flow by inlets (%)
				F1	F2	F3	F4	F5,6	F7,8	
0	20.0	60	240	c	c	c	c	•	•	32
1	20.1	130	170	c	c	c	c	•	•	32
2	20.6	900	60	c	c	c	c	•	•	33
3	21.1	-	-	f	f	f	f	•	•	42
4	22.0	-	-	f	f	f	f	•	•	52
5	23.0	-	-	f	f	f	f	f	•	62
6	23.7	-	-	f	f	f	f	f	•	72
7	24.7	-	-	f	f	f	f	f	•	81
8	25.5	-	-	f	f	f	f	f	•	85
9	26.5	-	-	f	f	f	•	f	f	90
10	27.8	-	-	f	f	f	•	f	f	100

c – operating mode on/off; f – continuous operation; • – fan off

Source: own elaboration / Źródło: opracowanie własne

The microclimate controller displayed the inside temperature, pressure inside the poultry house, the opening angle of flaps in air inlets and working fans. However, it was not equipped with the output for recording devices. Therefore, the ventilation rate was determined on the basis of temperature measurements, the user setting of fans and characteristics of used ventilation fans. During each 24-hour measurement series, the air temperature inside the poultry house was measured every 5 minutes by the logger Testo 175 H2. It was located close to the temperature sensor of microclimate controller.

Concentration and emission of gases

During 18 months, 13 series of measurements were made. The concentrations of ammonia, nitrous oxide and methane were measured every 5 minutes, in each of 24-hour series. The photo-acoustic spectrometer Multi Gas Monitor Innova 1312 was used to measure the concentrations of the gases inside and outside the building. It was equipped with the filters: type UA 0976 for NH₃ (detection limit 0.15 mg·m⁻³), type UA 0985 for N₂O (detection limit 0.06 mg·m⁻³) and type UA 0969 for CH₄ (detection limit 0.28 mg·m⁻³). Daily measurements were preceded by preliminary tests. The concentrations of studied gases were measured at the inlet to each of the air removing ducts in the building (Fig. 2). These values did not differ by more than 5%. Therefore, the point located at the inlet of air duct located in the central part of the poultry house was chosen as a representative sampling point (Fig. 3).

The emission of ammonia and greenhouse gases E_g (g·h⁻¹) from studied poultry house calculated according to the equation (1):

$$E_g = VR \cdot (C_{in} - C_{out}) \cdot 10^2 \quad (1)$$

where:

VR – ventilation rate (m³·h⁻¹),

C_{in} – gas concentration inside the building (mg·m⁻³),

C_{out} – gas concentration outside the building (mg·m⁻³).

The determined emission values were expressed per hen and per LU – emission factor EF (g·day⁻¹·hen⁻¹; g·day⁻¹·LU⁻¹). The livestock unit is 500 kg of animal body mass).

Statistical analyses

To determine the relationships between gases concentration and ventilation rate were calculate the Spearman's rank correlation coefficients. Spearman rank correlation test does not assume any assumptions about the distribution of the

data and is the appropriate correlation analysis when the variables are measured on a scale that is at least ordinal. The significance level of regression coefficient was 0.05. The statistical analysis was made using the Statistica 12 software.

3. Results and discussion

Weather conditions have a direct impact on emissions of air pollutants. They affect the microclimate parameters in poultry houses, such as temperature and relative humidity, which determine the concentration of pollutants and air exchange in the building. Values of selected microclimate parameters and the mass and number of animals are shown in Tab. 3.

Concentrations of gases in the studied poultry house were correlated with the ventilation rate. For NH₃ and N₂O it was a negative correlation, and coefficients were -0.92 and -0.66 respectively. The strong positive correlation ($r = 0.86$) was noted for CH₄.

The mean concentration of NH₃ during the whole study was 21.3±11.6 mg·m⁻³ and it was greater than the published values (Tab. 4). Several times lower concentrations were measured in battery cage poultry houses, both with the belt system for manure removal [1, 10] and the deep-pit system [13, 24]. Low concentrations of NH₃ in those buildings may be due to the removal of droppings (emission source) to outside storages, in manure belt systems or the limited access to oxygen in deep-pit systems. Higher than in battery cage poultry houses the NH₃ concentration noted Dekker et al. [3] in aviary systems for hens with belt removal of the manure. In those buildings litter was used (floor, paddock, aviary), which contributed to the formation of NH₃. Nimmermark and Gustafsson [17] and Hayes et al. [10] conducted research in deep litter/slatted floor poultry houses. Nimmermark and Gustafsson [17] noted NH₃ concentration similar to the results of this study. The NH₃ concentration measured by Hayes et al. [10] was much lower than presented value in this work, but studied facility had the paddock, where manure was stored. Emission from the outside area was not included in total emission from hen house.

For N₂O, mean concentration was equal to 2.50±1.23 mg·m⁻³. This value was several times higher than the results presented in published papers (Tab. 4). The release of the gas has a random nature and depends on many factors which can not always be identified [19]. The high concentration of NH₃ may be one of the reasons. Ammonia

is converted to N₂O during the incomplete nitrification and denitrification processes. The statistical analysis confirmed it in studied poultry house. The correlation coefficient between the concentration of N₂O and NH₃ was 0.80.

For CH₄, the housing system, manure removal system,

feed composition, etc. had no significant effect on its concentration. Mean value of CH₄ concentration in these studies was 6.3±3.4 mg·m⁻³. It was similar to the results of other studies (Tab. 4).

Table 3. Selected parameters and indoor concentration of studied gases, mass and number of animals

Tab. 3. Wybrane parametry mikroklimatu, masa i liczba zwierząt

Day	Hen number	Mass of hen (kg)	Total mass (kg)	Indoor temperature (°C)	Ventilation rate (m ³ ·s ⁻¹)	Indoor concentration (mg·m ⁻³)		
						NH ₃	N ₂ O	CH ₄
I	9,682	3.10	30,050	24	17.16	13.5	1.03	3.2
II	9,621	3.12	30,050	29	26.61	9.5	1.06	7.7
III	9,583	3.71	35,600	28.8	26.61	10.5	1.92	11.5
IV	9,562	3.72	35,600	22.5	17.16	19.7	1.71	7.4
V	9,522	3.74	35,600	21.5	17.16	17.8	1.82	7.5
VI	9,504	3.86	36,640	20.1	15.77	12.2	1.92	9.0
VII	10,695	3.82	40,862	19.7	5.79	33.5	3.00	2.9
VIII	10,672	3.87	41,343	19.7	5.79	42.6	5.13	1.0
IX	11,716	2.96	34,704	24.1	18.98	19.4	4.16	9.7
X	11,582	3.22	37,345	24.2	28.93	10.7	2.22	11.3
XI	11,506	3.69	42,415	22.8	18.98	13.7	2.00	6.0
XII	11,461	4.10	47,030	21.7	8.3	32.8	3.35	3.0
XIII	11,403	4.13	47,142	20.6	2.3	41.7	3.60	2.2

Source: own elaboration / Źródło: opracowanie własne

Table 4. The published concentration of NH₃, N₂O and CH₄

Tab. 4. Stężenia NH₃, N₂O i CH₄ dostępne w literaturze przedmiotu

Gas concentration (mg·m ⁻³)			Housing system	Source
NH ₃	N ₂ O	CH ₄		
6.7±4.0	-	-	Battery system with deep-pit	[13]
4.2±2.3	0.69±0.24	5.2±2.9	Battery system with deep-pit	[24]
1.7±0.1	-	-	Battery system with manure belts	[10]
2.0±1.4	0.50±0.20	4.6±1.8	Battery system with manure belts	[1]
13.9±7.5	0.52±0.10	4.0±1.9	Aviary system with manure belts, an outdoor run and a winter garden	[3]
6.5±6.3	-	7.1±4.8	Aviary system with manure belts	[11]
15.7±11.7	-	-	Depp litter system, slatted floor	[17]
5.7±0.1	-	-	Depp litter system, slatted floor, an outdoor run	[10]
21.3±11.6	2.50±1.23	6.3±3.4	Depp litter system, slatted floor	Own study

Source: own elaboration / Źródło: opracowanie własne

On the basis of the outside and inside concentration of studied gaseous pollutants and ventilation rate were calculated emission factors (E_F), expressed per hen and per LU were calculated (Tab. 5).

Table 5. The emission factors of NH₃, N₂O and CH₄

Tab. 5. Wskaźniki emisji NH₃, N₂O i CH₄

Day	Emission factor (E_F)					
	(g·day ⁻¹ ·hen ⁻¹)			(g·day ⁻¹ ·LU ⁻¹)		
	NH ₃	N ₂ O	CH ₄	NH ₃	N ₂ O	CH ₄
I	1.94	0.009	0.40	312	1.5	64
II	2.17	0.045	1.64	348	7.3	262
III	2.25	0.199	2.50	302	26.8	336
IV	2.93	0.026	0.91	393	3.5	123
V	2.59	0.153	1.04	346	20.4	138
VI	1.63	0.086	1.09	211	11.2	142
VII	1.52	0.052	0.05	199	6.8	6
VIII	1.93	0.202	0.01	249	26.0	1
IX	2.57	0.332	1.11	434	56.0	187
X	2.07	0.119	2.08	322	18.4	322
XI	1.84	0.135	0.70	250	18.3	95
XII	1.98	0.135	0.11	242	16.5	13
XIII	0.71	0.043	0.02	86	5.3	2

Source: own elaboration / Źródło: opracowanie własne

Table 6. The published emission factors of NH₃, N₂O and CH₄
 Tab. 6. Wskaźniki emisji NH₃, N₂O i CH₄ dostępne w literaturze przedmiotu

Emission factor (g·day ⁻¹ ·hen ⁻¹ ; g·day ⁻¹ ·LU ⁻¹)			Housing system	Source
NH ₃	N ₂ O	CH ₄		
0.99; 330*			Battery system with deep-pit	[13]
ND; 298			Battery system with deep-pit	[12]
ND; 144*		ND; 25*	Battery system with deep-pit	[14]
0.13; 31*	0.009; 2.31*	0.11; 29*	Battery system with deep-pit	[24]
ND; 287			Battery system with manure scraper	[15]
ND; 197			Battery system with deep-pit	[22]
0.10; ND			Battery system with manure belts	[10]
0.12; 29*	0.005; 1.25*	0.09; 23*	Battery system with manure belts	[1]
0.41; 107*	0.003; 0.82*	0.08; 21*	Aviary system with manure belts, an outdoor run and a winter garden	[3]
0.15; 41		0.09; 25	Aviary system with manure belts	[11]
ND; 177			Deep litter system (England)	[8]
ND; 227			Deep litter system (Netherlands)	[8]
ND; 261			Deep litter system (Denmark)	[8]
	0.423*; ND	0.93*; ND	Deep litter system	[16]
0.32; ND			Depp litter system	[5]
0.38; ND			Depp litter system, slatted floor	[17]
0.50; ND			Depp litter system, slatted floor, an outdoor run	[10]
2.01; 284	0.118; 16.8	0.90; 130	Depp litter system, slatted floor	Own study

ND - no data; *recalculated data

Source: own elaboration / Źródło: opracowanie własne

The mean NH₃ emission factor was 2.01±0.53 g·day⁻¹·hen⁻¹ (284±88 g·day⁻¹·LU⁻¹). It is similar to the results of research in systems where manure was stored in the poultry house (battery cage system with deep-pit, deep litter system) [8, 12, 13, 15]. Lower emission factors were determined during studies in poultry houses with manure belt removal [1, 3, 10, 11]. But in those houses small amount of manure is in the buildings, most of it is stored outside. Therefore during the comparisons of such buildings with other systems the emission should also include that from outside storages. The lower values of NH₃ emission factor noted Eurich-Menden et al. [5], Nimmermark and Gustafsson [17] and Hayes et al. [10], in poultry houses with litter systems or deep litter/slatted floor systems. However, for litter systems, the differences may be due to many factors: the type and amount of litter, bedding frequency, animal activity, temperature of air and litter, air humidity, etc. [7, 9] (Tab. 6).

The mean emission factor of N₂O from studied object was equal to 0.118±0.087 g·day⁻¹·hen⁻¹ (16.8±13.9 g·day⁻¹·LU⁻¹). It is much higher than the results of studies conducted in battery cage poultry houses or aviary systems [1, 3, 24]. Higher emissions of N₂O from the studied poultry house may result from the using of litter, where is high content of NH₄⁺, high pH and temperature. This affects the activity of nitrifying and denitrifying bacteria, what causes the release of that gas [4, 18]. Similar value of N₂O emission factor obtained Mennicken [16], conducting research in the poultry house with litter.

The determined mean emission factor of CH₄ was 0.90±0.77 g·day⁻¹·hen⁻¹ (130±114 g·day⁻¹·LU⁻¹), and the same as for N₂O, it was much higher than the emission factors obtained during research in battery cage poultry houses or aviary systems [1, 3, 24] and comparable with the results of research conducted in the poultry house with litter by Mennicken [16].

4. Conclusions

Mean concentrations of gases in the studied poultry house were 21.3±11.6 mg·m⁻³ for NH₃, 2.50±1.23 mg·m⁻³ for N₂O and 6.3±3.4 mg·m⁻³ for CH₄.

Gas concentrations in the studied poultry house were correlated with the ventilation rate. The correlation coefficients were: r_{NH3} = -0.92, r_{N2O} = -0.66 and r_{CH4} = 0.86 (p≤0.05).

The emission factors of studied gaseous pollutants were on average: 2.01±0.53 g·day⁻¹·hen⁻¹ (284±88 g·day⁻¹·LU⁻¹) for NH₃, 0.118±0.087 g·day⁻¹·hen⁻¹ (16.8±13.9 g·day⁻¹·LU⁻¹) for N₂O and 0.90±0.77 g·day⁻¹·hen⁻¹ (130±114 g·day⁻¹·LU⁻¹) for CH₄.

5. References

- [1] Alberdi O., Arriaga H., Calvet S., Estellés F., Merino P.: Ammonia and greenhouse gas emissions from an enriched cage laying hen facility. *Biosystems Engineering*, 2016, 144, 1-12.
- [2] Brouček J., Čermák B.: Emission of harmful gases from poultry farms and possibilities of their reduction. *Ekológia*, 2015, 34(1), 89-100.
- [3] Dekker S.E.M., Aarnink A.J.A., de Boer I.J.M., Groot Koerkamp P.W.G.: Emissions of ammonia, nitrous oxide, and methane from aviaries with organic laying hen husbandry. *Biosystems Engineering*, 2011, 110, 123-133.
- [4] Dewes T.: Effect of pH, temperature, amount of litter and storage density on ammonia emissions from stable manure. *Journal of Agricultural Science*, 1996, 127, 501-509.
- [5] Eurich-Menden B., Döhler H., Van den Weghe H.: Ammonia emission factors within the agricultural emission inventory - Part 2: Poultry and fattening pigs. *Landtechnik*, 2011, 66, 60-63.
- [6] Fabbri C., Valli L., Guarino M., Costa A., Mazzotta V.: Ammonia, methane, nitrous oxide and particulate matter emissions from two different buildings for laying hens. *Biosystems Engineering*, 2007, 97, 441-455.
- [7] Gilhespy S.L., Webb J., Chadwick D.R., Misselbrook T.H., Kay R., Camp V., Retter A.L., Bason A.: Will additional straw bedding in buildings housing cattle and pigs reduce

- ammonia emissions? *Biosystems Engineering*, 2009, 102, 180-189.
- [8] Groot Koerkamp P.W.G., Metz J.H.M., Uenk G.H., Phillips V.R., Holden M.R., Sneath R.W., Short J.L., White R.P., Hartung J., Seedorf J., Schröder M., Linkert K.H.: Concentrations and Emissions of Ammonia in Livestock Buildings in Northern Europe. *Journal of Agricultural Engineering Research*, 1998, 70, 79-95.
- [9] Guingand N., Rugani A.: Impact of the Reduction of Straw on Ammonia, GHG and Odors Emitted by Fattening Pigs Housed in a Deep-litter System. In: *Proceedings of Ninth International Livestock Environment Symposium Sponsored by ASABE*, Valencia, Spain, 2012.
- [10] Hayes E.T., Curran T.P., Dodd V.A.: Odour and ammonia emissions from intensive poultry units in Ireland. *Bioresource Technology*, 2006, 97, 933-939.
- [11] Hayes M.D., Xin H., Li H., Shepherd T.A., Zhao Y., Stinn J.P.: Ammonia, Greenhouse Gas, and Particulate Matter Emissions of Aviary Layer Houses in the Midwestern U.S.. *Transactions of the ASABE*, 2013, 56(5), 1921-1932.
- [12] Heber A.J., Ni J.Q., Lim T.T., Chervil R., Tao P.C., Jacobson L.D., Hoff S.J., Zhang Y., Koziel J.A., Beasley D.S., Sweeten J.M.: Air pollutant emissions from two high-rise layer barns in Indiana, In: *Proc. Annual Conference and Exhibition of the Air and Waste Management Association*. Air and Waste Management Association, Pittsburgh, PA, 2005.
- [13] Liang Y., Xin H., Tanaka A., Lee S.H., Li H., Wheeler E.F., Gates R.S., Zajackowski J.S., Topper P., Casey K.D.: Ammonia emissions from U.S. poultry houses: part II – layer houses. In *proceedings of the 3rd International Conference on Air Pollution from Agricultural Operations*. Research Triangle Park, New York, 2003.
- [14] Lim T.T., Heber A.J., Ni J.Q.: Air quality measurements at a laying hen house: Ammonia concentrations and emissions. *American Society of Agricultural and Biological Engineers Conference*, 2003.
- [15] Lin X.J., Cortus E.L., Zhang R., Jiang S., Heber A.J.: Ammonia, hydrogen sulfide, carbon dioxide and particulate matter emissions from California high-rise layer houses. *Atmospheric Environment*, 2012, 46, 81-91.
- [16] Mennicken L.: Biobett für Legehennen – ein Beitrag zum Umweltschutz? *DGS*, 1998, 13, 12–20.
- [17] Nimmermark S., Gustafsson G.: Influence of Temperature, Humidity, and Ventilation Rate on the Release of Odour and Ammonia in a Floor Housing System for Laying Hens. *Agricultural Engineering International: the CIGR Ejournal*, Manuscript BC 04 008, 2005, Vol. VII.
- [18] Philippe F.X., Laitat M., Canart B., Vandenhede M., Nicks B.: Comparison of ammonia and greenhouse gas emissions during the fattening of pigs, kept either on fully slatted floor or on deep litter. *Livestock Science*, 2007, 111, 144-152.
- [19] Philippe F.X., Nicks B.: Review on greenhouse gas emissions from pig houses: Production of carbon dioxide, methane and nitrous oxide by animals and manure. *Agriculture, Ecosystems and Environment*, 2015, 199, 10-25.
- [20] Pinder R.W., Adams P.J., Pandis S.N., Gilliland A.B.: Temporally resolved ammonia emission inventories: current estimates, evaluation tools, and measurement needs. *Journal of Geophysical Research*, 2006, 111, D16310.
- [21] Wang E., Xing L., Wu G., Guan Y.: Nitrous oxide emission during nitrification of influents with different ammonium concentrations. *Environmental Engineering and Management Journal*, 2015, 15(1), 19-25.
- [22] Wang-Li L., Li Q., Chair L., Cortus E., Wang K., Kilic I., Bogan B., Ni J., Heber A.: The national air emissions monitoring study's southeast layer site: Part III. Ammonia concentrations and emissions. *Transactions of the ASABE*, 2013, 56 (3), 1185-1197.
- [23] Webb J., Menzi H., Pain B.F., Misselbrook T.H., Dämmgen U., Hendriks H., Döhler H.: Managing ammonia emissions from livestock production in Europe. *Environmental Pollution*, 2005, 135, 399-406.
- [24] Zhu Z., Dong H., Zhou Z., Xin H., Chen Y.: Ammonia and Greenhouse Gases Concentrations and Emissions of a Naturally Ventilated Laying Hen House in Northeast China. *Transactions of the ASABE*, 2011, 54(3), 1085-1091.